

DAILY




Chassis Cowl 65C/70C – CNG Euro VI/d


Chassis Cowl



Stripped Chassis Cowl

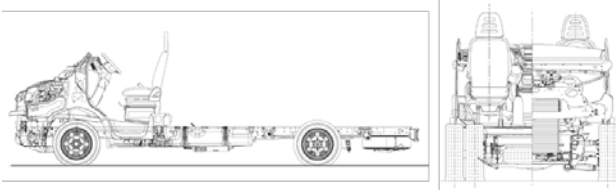

CNG tanks Layout

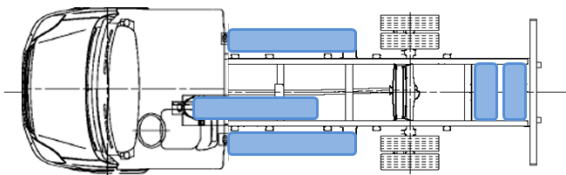

WHEELBASE (mm)	3750	4350	4750	5100(*)
LENGTH (mm)	6463	7283	8148	8148
WIDTH (mm)	2052			
FRONT OVERHANG (mm)	1048			
REAR OVERHANG (mm)	1665	1885	2350	2000
FRONT TRACK (mm)	1725			
REAR TRACK (mm)	1660			
TURNING DIAMETER WALL TO WALL (mm)	13694	15518	16734	17790
TURNING DIAMETER KERB TO KERB (mm)	13048	14866	16078	17162
WEIGHTS				
MODEL	65C	70C		
GROSS VEHICLE MASS (kg)	6500	7200		
FRONT AXLE PLATED MASS (kg)	2300	2500		
REAR AXLE PLATED MASS (kg)	5000	5350		

(*) 5100 mm wheelbase is available only as Cutaway

FIC EURO VI/d CNG	
MAX POWER	100 kW (136 hp) @ 3500 rpm
MAX TORQUE	350 Nm @ 1500 - 2730 rpm
DISPLACEMENT	3.0 liters
4 In-Line cylinders. Multi Point injection	

BODYWORK / EXTERIOR EQUIPMENT

Anti-corrosion protection by full cathoretic dipping
 C-section chassis frames linked by tubular cross members
 Covering canvas for cab protection
 Heated electric rearview mirrors with integrated direction indicators
 Black calendar

Optional:

- Chromed calendar (With HI-Matic)
- Blue Power visual identity

ELECTRICAL SYSTEM

CAN-bus system with Bodybuilder connector
 12 V – 110 Ah Battery
 180 A Alternator
 Daylights
 Remote central locking
 CANopen interface with bodybuilder connector

Optional:

- Full LED headlights
- Automatic wipers and headlights
- Emergency central switch
- Front fog lights with cornering function
- Auto battery cut-off
- Anti-theft with remote central locking
- Third key with remote control
- 13-pin DIN electric socket
- FMS bus

WINDOWS / THERMAL COMFORT

Driver's place exchange heater driven by 4-speed fan with distribution and recirculation mode
 Connection for passengers heating

Optional:

- Additional heater
- 170cc A/C compressor
- Manual or automatic A/C for driver's compartment
- Connection for passengers heating and additional heater

DRIVER COMPARTMENT

New Soft-touch steering wheel, fixed, 380 mm diameter
 TFT Cluster with Body computer
 Steering wheel controls
 3 degree suspended adjustable driver seat with lumbar adjustment
 Heated electric mirrors
 Digital tachograph 4.0
 Radio preparation

Optional:

- Axial and angular adjustable steering wheel
- Leather-trimmed steering wheel
- Rich dashboard (Blue color)
- Open storage compartment with USB, additionally with inductive charging
- Heated suspended adjustable driver seat
- Textile headrest
- Adjustable speed limiter
- Digital radio (DAB)
- DAB Radio with Iveco Apps
- Hi-Connect
- Hi-Connect with Tom Tom Navi for commercial vehicles
- Telematic Box

ENGINE

Iveco F1C EURO VI Step d CNG
 Overall displacement: 2998 cc.
 Longitudinal frontal position
 Otto cycle, 4 In-Line cylinders
 Injection type: Sequential timed with Multi Point
 Suction: Wastegate valve turbocharging
 Exhaust after-treatment system: Three-way catalyst

GEARBOX

FPT 2840.6 Overdrive mechanical gearbox , 6 gears and reverse
 Single dry plate , pull type clutch, with automatic adjustment

Optional:

- ZF Hi-Matic 8HP

REAR AXLE

Rigid, simple reduction
 Double wheels
 Rear axle ratios: 5.13

Optional:

- Differential lock
- Rear axle ratios: 4.30 / 4.556

FRONT AXLE / STEERING

Independent wheels
 Electric Power Steering

SUSPENSION

Front:

QUADTOR with torsion bar and hydraulic telescopic shock absorbers

Rear:

Mechanical suspension with dual-leaf parabolic springs and hydraulic telescopic shock absorbers

Optional:

- Air suspension (WABCO – ECAS)

BRAKING SYSTEM

ESP9: includes ABS, ASR, EBD, Hill Holder (HHC), understeering control, emergency braking assistant (HBA), hydraulic fading compensation (HFC)
 Service brake: vacuum assisted hydraulic brake, independent circuits for front and rear axle

Front and rear disc brakes with pads wear sensors

Emergency brake: integrated with the service brake

Parking brake: mechanical, manual, acting on the rear wheels

Telma retarder (mandatory)

Optional:

- Without AEBS

FUEL TANK

3 CNG tanks located in the wheelbase (190 lt overall capacity)

Optional:

- Additional CNG tanks located in the rear overhang (56 lt overall capacity)

TYRES

225/75 R 16

Spare wheel

Spare wheel carrier

Optional:

- Inflation Kit

ADVANCED DRIVER-ASSISTANCE SYSTEMS (ADAS)

AEBS (radar only)

For more info, contact your Iveco reference

Optional:

- AEBS and City Brake
- LDWS and Proactive Lane Keeping
- Crosswind Assist
- Hill descent & Traction+
- Tire Pressure Monitoring System