


DAILY



Daily Panel Van – Diesel Euro VI/d

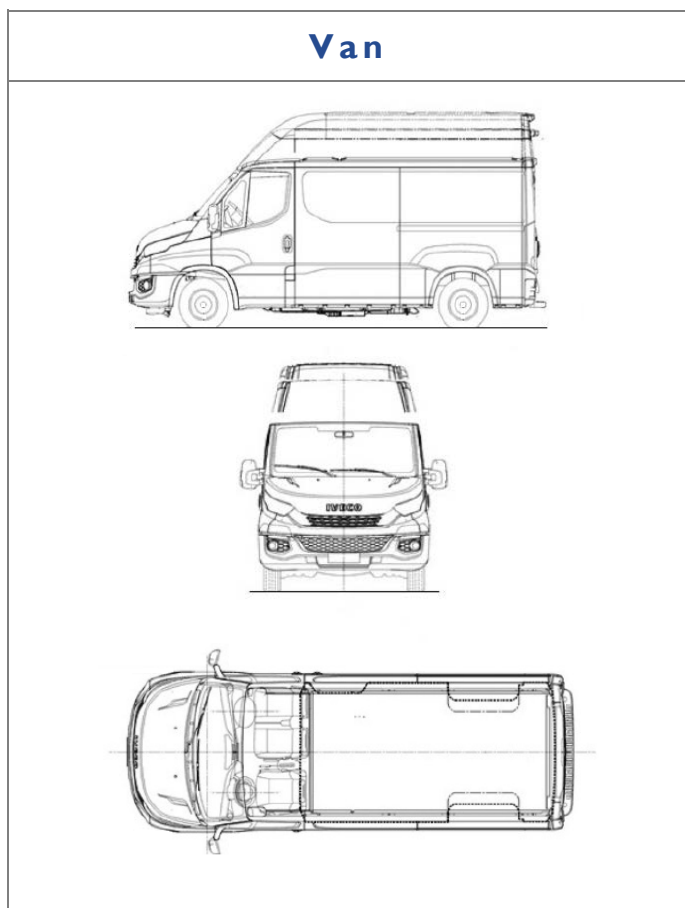

WHEELBASE (mm)	3520L	4100	4100L	4100L
LENGTH (mm) (*)	6003	7168	7619	7619
WIDTH (mm)	2052	2052	2052	2174
OVERALL HEIGHT (mm)	2900	2900	2900	2900 3100
FRONT OVERHANG (mm)	1048			
REAR OVERHANG (mm)	1435	2020	2390	2390
FRONT TRACK (mm)	1724			
REAR TRACK (mm)	1540	1540	1540	1661
TURNING DIAMETER WALL TO WALL (mm)	15190	15190	14758	14758
TURNING DIAMETER KERB TO KERB (mm)	14564	14564	14108	14108
WEIGHTS				
MODEL	40C	50C	50C	65C
GROSS VEHICLE MASS (kg)	4500	5600	5600	6500
FRONT AXLE PLATED MASS (kg)	2100	2100	2100	2300
REAR AXLE PLATED MASS (kg)	3100	3700	3700	5000

(*) Length measured on read doors edge

	FIA EURO VI/d	FIC EURO VI/d	
MAX POWER	110 kW (156 hp) @ 3500 rpm	132 kW (180 hp)@ 3500 rpm	155kW (210hp)@ 3500 rpm
MAX TORQUE	380 Nm @ 1750 - 2000 rpm	430 Nm @ 1600 - 2865 rpm	470 @ 1400 - 3050 rpm
DISPLACEMENT	2.3 liters	3.0 liters	
4 In-Line cylinders. Unijet Common Rail			

BODYWORK / EXTERIOR EQUIPMENT

Anti-corrosion protection by full cathophoretic dipping
 C-section chassis frames linked by tubular cross members
 Manual front door
 Side sliding door (requires 20 liters AdBlue tank under cab)
 Rear door open 180 degrees
 Rear footstep
 Manual rearview mirrors

Optional:

- Side sliding door (requires 20 liters AdBlue tank under cab)
- Plug (Vendor) door (Cityversion 4100L)
- Rear door open 270 degrees
- Heated electric rearview mirrors

INTERIOR EQUIPMENT

Steel roof and floor

Optional:

- R66 preparation

ELECTRICAL SYSTEM

CAN-bus system with Bodybuilder connector
 12 V – 110 Ah Battery
 220 A Alternator
 Daylights, rear fog lights and 3° stop light
 Remote central locking
 Bodybuilder connector

Optional:

- Full LED headlights
- Fog lights with cornering
- Automatic wipers and headlights control
- Emergency central switch
- FMS bus

WINDOWS / THERMAL COMFORT

Athermal windscreen
 Driver's place exchange heater driven by 4-speed fan with distribution and recirculation mode
 Additional heater preparation

Optional:

- Heated windscreen
- 170cc A/C compressor with manual or automatic A/C for driver's compartment

DRIVER COMPARTMENT

New Soft-touch steering wheel, fixed, 380 mm diameter
 TFT Cluster with Body computer
 Suspended adjustable driver seat
 Radio preparation
 Smart tachograph 4.0

Optional:

- Axial and angular adjustable steering wheel
- Suspended adjustable driver seat with lumbar support and heating function
- Adjustable speed limiter with cruise control
- Open storage compartment with USB, additionally with inductive charging
- DAB Radio, additionally with Iveco Apps
- Hi-Connect, additionally with Tom Tom navi for commercial vehicles
- Telematic Box
- Parking sensors

ENGINE

M2 bus approval: Iveco FIA EURO VI diesel 156 hp (110 kW) step d, 4 In-Line cylinders 2.3 liters, longitudinal frontal position, injection type: Uni-jet common rail - 16 valves, e-VGT

M3 bus approval: Iveco FIC EURO VI diesel 180 hp (132 kW) Step d, 4 In-Line cylinders 2998 cc, longitudinal frontal position, Injection type: Uni-jet common rail - 16 valves, VGT

Exhaust after-treatment system: EGR + SCR

Optional:

- HVO (Hydrogenated Vegetable Oil)
- Engine FIC diesel 210 hp step d e-VGT

GEARBOX

FPT 2840.6 6-speed manual gearbox

Optional:

- ZF Hi-Matic 8HP (compulsory for 156 hp and 210 hp)

REAR AXLE

Rigid, simple reduction
 Double wheels
 Rear axle ratios: 4.30 / 4.556 / 5.13

Optional:

- Differential lock

FRONT AXLE / STEERING

Independent wheels
 Electric Power Steering

SUSPENSION

Front: QUADTOR with torsion bar and hydraulic telescopic shock absorbers
 Rear: mechanical suspension with dual-leaf parabolic springs and hydraulic telescopic shock absorbers

Optional:

- Air suspension (WABCO – ECAS)

BRAKING SYSTEM

ESP9: includes ABS, ASR, EBD, Hill Holder (HHC), understeering control, emergency braking assistant (HBA), hydraulic fading compensation (HFC)

Service brake: vacuum assisted hydraulic brake, independent circuits for front and rear axle

Front and rear disc brakes with pads wear sensors

Emergency brake: integrated with the service brake

Parking brake mechanical

AEBS

Optional:

- Telma retarder

FUEL TANK

70 liters shaped diesel tank

20 liters AdBlue tank in the wheelbase for vendor and manual front door

Optional:

- 20 liters AdBlue tank under cab for side sliding door version
- 90 liters diesel tank
- 100 liters shaped diesel tank

TYRES

195/75R16 (40C/50C), 225/75 R 16 (65C)

Spare wheel

Spare wheel carrier

Optional:

- Inflation Kit

ADVANCED DRIVER-ASSISTANCE SYSTEMS (ADAS)

LDWS

AEBS and City Brake

Optional:

- ACC (Adaptive Cruise Control)
- ACC and Queue Assist
- LDWS and Proactive Lane Keeping
- Crosswind Assist
- Hill descent & Traction+
- Tire Pressure Monitoring System